

TIGER Neo

48HL4M-DE


450-475

N TOPCon
LID/LETID

ROT 3.0

ROT 3.0

N-Type

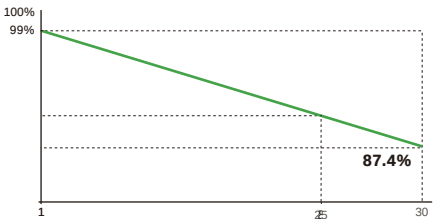

0.4%

- IEC61215: 2021 / IEC61730: 2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015,
- ISO14001:2015,
- ISO45001:2018,



PID

PID



POSITIVE QUALITY
Continuous Quality Assurance

48HL4M-DB 450-475 ワット

	1792 × 1140 × 1249 mm
	37 / , 74 / ,
(2 = 1)	962 /40

(STC)

(Pmax) [Wp]	
(Vmp) [V]	
(Imp) [A]	
(Voc) [V]	
(Isc) [A]	
(STC) [%]	
	0 ~ + 3 %
(Pmax)	-0.29 %/°C
(Voc)	-0.25 %/°C
(Isc)	0.045 %/°C

	-40 °C ~ +70 °C
	1500 VDC (IEC)
	30 A

- (48HL4M-DB 460W)

- (48HL4M-DB 460W)