


- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015:
- ISO14001:2015:
- ISO45001:2018:

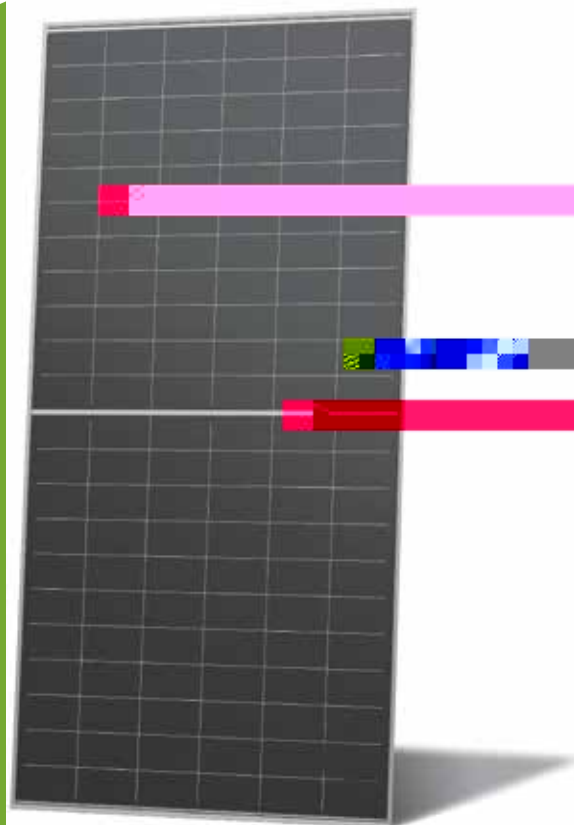

JKM605-630N-66HL4M-BDV-F6-CN

66HL4M-BDV 605-630 W

	N
	132 66 × 2
	2382 × 1134 × 30 mm
	32.4 kg
	2.0 mm
	2.0 mm
	IP68
	Class II
IEC	Class C
	JK03M/MC4/
	4.0mm ²
	(+): 300 mm, (-): 200 mm;

	2396 × 1110 × 1251 mm				
	13	36	/	20	/ 720 /
	17.5	36	/	25	/ 900 /

(STC)

Pmax [W]*	
Vmp [V]	
Imp [A]	
Voc [V]	
Isc [A]	
[%]	
	0 ~ + 3%
Pmax	-0.29%/°C
Voc	-0.25%/°C
Isc	0.045%/°C
(STC)	1000W/m ² 25°C 1.5. * ± 3%

(BNPI)

Pmax [W]*	
Vmp [V]	
Imp [A]	
Voc [V]	
Isc [A]	
(BNPI)	1000W/m ² 135W/m ² 25°C 1.5

T ₉₈ ≤ 70 °C	-40°C ~ +70°C
	1500VDC (IEC)
	35 A
	φVoc: 98 ± 5 %, φIsc: 80 ± 5 %, φPmax: 80 ± 5 %

