


66QL6-BDX

650-680 Watt

85 ± 5%

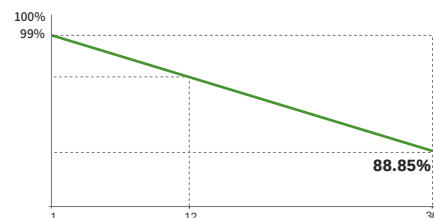

年	1	12	30
功率 (%)	99%		88.85%

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: 质量管理体系
- ISO14001:2015: 环境管理体系
- ISO45001:2018: 职业健康安全管理体系



66QL6-BDX

	2442 × 1140 × 1251 mm				
	13	36	/	20	/ 720 /
	17.5	36	/	25	/ 900 /


(STC)

- Pmax [Wp]*	
- Vmp [V]	
- Imp [A]	
- Voc [V]	
- Isc [A]	
[%]	
	0 ~ +3 %
	-0.26 %/°C
	-0.24 %/°C
	0.046 %/°C
(STC)	1000W/m² 25°C 1.5 * ± 3%

(BNPI)

(BNPI)	1000W/m² 135W/m² 25°C 1.5 ± 3%

	-40 °C ~ +70 °C
	1500 VDC (IEC)
	35 A
	φVoc: 98 ± 5 %, φIsc: 85 ± 5 %, φPmax: 85 ± 5 %



- (66QL6-BDX 660W)

(V)

- (66QL6-BDX 660W)

(A)

(V)